

R Series

High-speed roll-up doors



EFAFLEX 
safe high-speed doors

R Series

High speed roll-up doors are extremely economical door systems for interiors. The EFAFLEX high-speed doors differ from other doors through their enormously high opening and closing speeds.

High-speed roll-up doors dampen noise, maintain temperature zones at a constant level, and avoid that drafts have a chance at your company!

All high-speed roll-up doors of the R series have a space-saving design due to the door opening. EFAFLEX high-speed roll-up doors are mostly maintenance-free, and different and individual designs are available.





EFA-SRT® The heavy-duty forklift door



The EFA-SRT® is a real all-round solution! It is suitable as an inside door or as an additional hall closure. The high-speed roll-up door from EFAFLEX is a high-quality solution for every opening that is passed by forklift trucks extremely often.

Power for top performance

Select the high-speed roll-up door EFA-SRT® from two different drive systems. For highly frequented passageways, EFAFLEX recommends a high-speed drive with microprocessor control and frequency converter. For less-frequented openings a direct drive is the most reasonably priced alternative.

Weight balance is effected through tension spring action (see drawing). This pulls the door upwards if the appropriate hand lever is moved, e.g. in the event of a power failure. A long service life is attained thanks to the order-specific calculation of spring tension.



Tension springs are installed in the side frames and directly connected to the drive shaft by heavy load belts. The springs are taut in the position "Door is closed" (left) and slack in the position "Door is open".

Overview EFA-SRT®

- As inside door or as an additional hall closure
- Maximum speed up to 2.6 m/s
- Wind load class 0 – 3
- Door leaf made of flexible, transparent, silicon-free PVC (standard)
- On request as stainless steel design
- 150,000 loadings per year with no problem

Always in good shape

Robust plastic ropes and tension springs in the side members of the door hold the door leaf under tension when opening and closing. Wind, overpressure, and heat or cold cannot affect the door leaf. It is always in shape and can be wound up and unwound without any problems. The extraordinary heavy-duty curtains are fully transparent or deliverable in different colours.



The EFAFLEX wind load system provides permanent door leaf tension. Perfect where wind or negative pressure causes a draft!

Work-saving

An inductive sensor is located directly at the motor. It sends the exact position of the door leaf to the control. The lifting height is automatically determined by the number of motor revolutions. Setting of the frame is not necessary.

EFA-SRT® with special curtains

The EFA-SRT® is also available with three special curtains. Each has different properties and is suitable for different applications. All curtains consist of a transversely stable material and are able to withstand higher wind loads due to this. All curtains are silicone free.

Special curtain 1: For food logistics.

This curtain is approved according to the FDA paragraphs for the transportation of dry food. Also available in antistatic material with or without window. Made of PVC-coated polyester.

Special curtain 2: Flame resistant.

The optimum variant, if you require a flame resistant curtain for your EFA-SRT®. Made of urethane-impregnated polyester

Special curtain 3: For spray booths and spray systems.

Special curtain, free of substances that impair paint application. Also made of urethane-impregnated polyester



EFA-SRT® with crash protection EFA-EAS

On request we can provide your high-speed roll-up door with the EFA-EAS crash protection.

This protective feature largely prevents expensive damage to the door leaf in the event of a crash.

Reliable safety

During a crash, the bottom door panel will be pressed out of its guides on both sides. Sensors signalize this to the control unit and stop the movement of the door immediately. The door curtain and end shield can be easily restored without using any manual lever. Your door is soon ready for use again.

If only everything was so simple

With the EAS protection, you avoid unprofitable down times and your logistics is even more effective. Moreover, the protection will reduce your repair costs. Decide in favour of EFA-EAS, and you will save time, money and a lot of trouble.



*Intelligent solution:
Combine your
EFA-SRT® with the
EFA-EAS crash protec-
tion!*

EFA-SRT® ECO: The economical door for inside



The EFA-SRT® ECO impresses with its excellent price-performance ratio. Due to the space-saving design, e.g. very slim side frames, special structural preparations are not necessary. The EFA-SRT® ECO is thus more flexible in its application than any other door.

Elaborate guides at the sides of the door leaf prevent undesired exchange caused by pressure differences and drafts. The standard door leaf is fully transparent and is provided with warning strips as standard. Coloured curtains are also deliverable. The guide profiles made of galvanized steel are also available in stainless steel.



Overview EFA-SRT® ECO

- Maximum speed up to 2 m/s
- Door blade made of flexible, transparent PVC
- On request as stainless steel design
- 150,000 loadings per year with no problem

For fast, safe material flow: The EFA-SRT® ECO can also be installed in connection with automatic transportation systems or at runways.



Clear way during power failures

The weight balance system for the opening and closing of the door is based on maintenance-free and wear-free counterweights. During a power failure, quick and easy emergency opening is possible. For this, simply activate the pull cord. This releases the brake and the door opens on its own.



EFA-SRT®-EC

The hygienic high-speed roll-up door

EFA-SRT®-EC is the optimized solution for all internal passages with the highest hygienic requirements, such as in the production of foods. It fulfils all requirements of the food industry.



Our engineers have developed this door in close cooperation with the industry. EFA-SRT®-EC is the EFAFLEX high-speed door for food and hygienic areas.

The Hygienic Professional

The entire door design is made of stainless steel as standard. The elastic curtain fulfils HACCP and FDA requirements.

The EFA-SRT®-EC can be used in limited installation conditions due to its space-saving design.



Overview EFA-SRT®-EC

- Easy to clean
- Fulfils all usual food norms
- Maximum speed up to 2 m/s
- Door design standard of stainless steel
- Elastic curtain in various colours
(meets HACCP and FDA requirements)

EC stands for “Easy Clean”

You can easily loosen the locking of the frame covers and swing open the frames for cleaning. All of the inside area can be cleaned with the steam jet.

Additional design detail: Cleaning agents and condensed humidity cannot accumulate inside the frames – liquids drain unimpeded (see photo below).

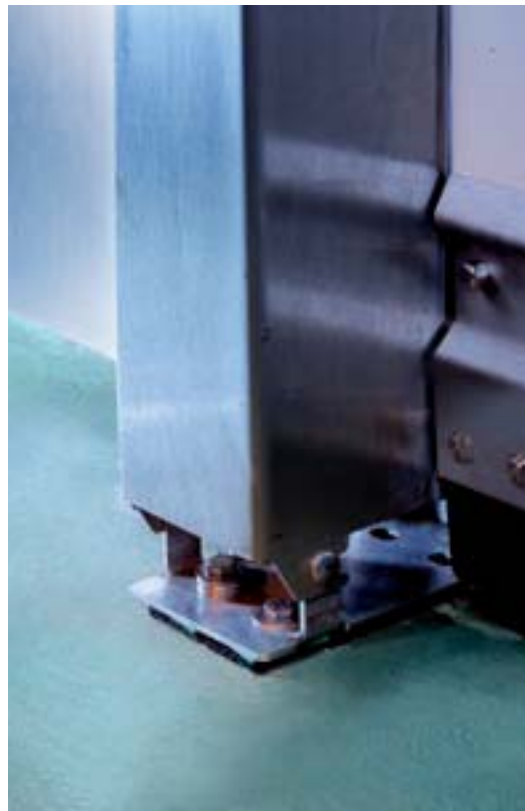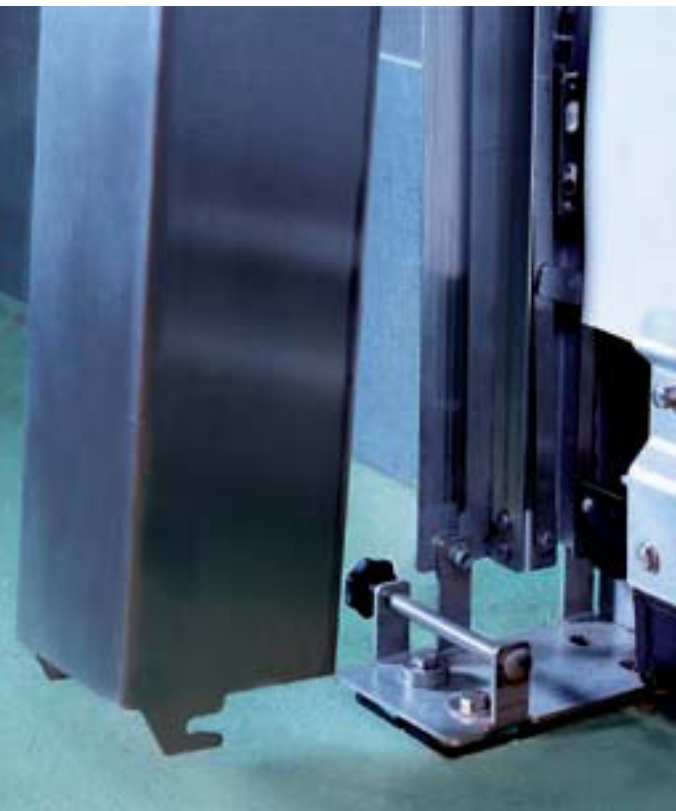

Slanted towards more hygiene

The cover of the winding shaft is slanted so that liquids can run off and nothing will drop onto the driveway or onto the food. This cover can be swung up with a few simple hand movements. Now you can easily clean the bottom side and the winding shaft is also easy to reach.



Drive and control

The electric and electronic parts of the microprocessors and frequency converters are housed in a V2A switch cabinet of protection class IP 65.

Clean weight balancing

Every part of the EFA-SRT®-EC is designed down to the last detail. The counterweight weight-balancing system of our hygienic professional is protected by a special anti-corrosion coating.



Technical Data:

		EFA-SRT® PREMIUM			
		ECO	L	S	EC
Application	Interior door Lock-up doors	● –	● ○	● ○	● –
Wind load max.*	According to DIN EN 12424 class or in km/h	– 18	0 – 3 –	– 38	– 18
Operating forces/safe opening	According to DIN EN 13241-1	fulfilled	fulfilled	fulfilled	fulfilled
Resistance against water ingress	According to DIN EN 13241-1 class	0	0	0	0
Air permeability*	According to DIN EN 13241-1 class	0	0	0	0
Direct airborne sound insulation R _w *	in dB according to DIN EN 717-1	12	12	12	12
U value maximum*	in W/m²K nach DIN EN 13241-1	–	–	–	–
Door size (in mm)	Width W max. Height H max.	4000 4000	4500 4500	6000 6000	3500 3750
Maximum door blade speed	in m/s	2.0	2.6	2.0	2.0
Average speed, ca. *	Opening in m/s Closing in m/s Closing in m/s, with EFA-TLG® door light-line grid	1.5 0.75 –	2.0 0.75 –	1.5 0.75 –	1.5 0.75 –
Door blade guidance	Round Spiral Oval Spiral Low-header	– – –	– – –	– – –	– – –
Steel design	Galvanized sheet steel frame Stainless steel Powder coated in RAL colours	● ○ ○	● ○ ○	● – ○	– ● –
Door blade	EFA-THERM® laths, double walled, insulated/painted EFA-THERM laths with double-walled transparent laths EFA-ISO-CLEAR double walled, thermally separated/anodized EFA-CLEAR single-walled/anodized Ventilation laths Colour according to RAL (without window panel) Door blade modules made of anodized aluminium E6/EV1 Vision panel single-walled/double-walled Non transparent infill single-walled/double-walled Door curtain made of flexible PVC, transparent with warning stripes in different colours Flexible fabric in different colours with/without window	– – – – – – – – – ● ○/○	– – – – – – – – – ● ○/○	– – – – – – – – – ● ○/○	– – – – – – – – – ○ ○/●
Fire class	Building Material class DIN 4102	B2	B2	B2	B2
Weight balancing by		Weight	Spring	Spring	Weight
Designed for approx ... Load cycles per year		150,000	150,000	150,000	150,000
Collision protection	Active Crash System EFA-ACS/EFA-EAS	–/○	–/○	–/○	–/–
Drive	Electric motor with frequency converter Pneumatic with electric controller	● –	● –	● –	● –
Control	EFA-CON® Frequency converter MCP2 with BUS technology Main switch and foil keypad Reversing contactor control/comfort	● ● ○ ● –	● ● ○ ● –	● ● ○ ● –	● ● ○ ● –
Lead	Electricity connection 230V/50Hz Electricity connection 400V/50Hz Circuit breaker Compressed air supply (1/2")	● – 16A(K) –	● – 16A(K) –	● – 16A(K) –	● – 16A(K) –
Manual locking		–	–	–	–
Emergency opening	Automatic after manual activation Manual activation	● –	● –	● –	● –
Safety Devices	EFA-TLG® door light-line grid in door closing line Contact edge Light barrier Approach area monitoring Light grid, external	– ● ○ ○ ○	– ● ○ ○ ○	– ● ○ ○ ○	– ● ○ ○ ○
Safety system including activator	EFA-SCAN® frame/bollard	–/○	–/○	–/○	–/○
Activators	Connection of all common activators possible	●	●	●	●

● Standard, ○ upon request, – Not available, * Depending on door blade, door blade guidance and door size, we reserve the right to make technical alterations!



DMF INTERNATIONAL PTY LTD
PO BOX 12 PENDLE HILL NSW 2145
SYDNEY AUSTRALIA
PH (02)96365466 FAX (02)96881531
www.dmf.com.au



EFAFLEX Tor- und Sicherheitssysteme
GmbH & Co. KG
Fliederstraße 14
D-84079 Bruckberg
Telephone +49 8765 82-0
Facsimile +49 8765 82-100
www.efaflex.com
info@efaflex.com